





■DESCRIPTION

Designed to be mounted on the circuit board, the unit converts an input/output of unbalanced type into that of balanced type.

■SPECIFICATIONS

Impedance	600 Ω ±10 %
Frequency Response	200 Hz - 10 kHz

■APPEARANCE

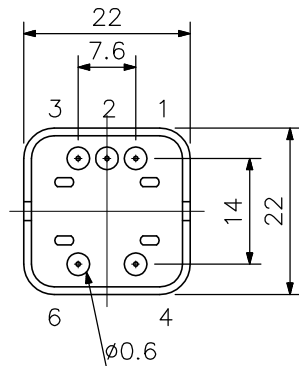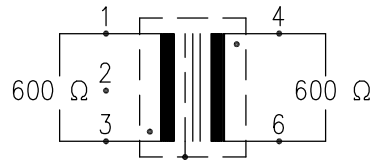

UNIT:mm SCALE:1/1