

Push-To-Talk Over Cellular Radio

PNC360S

The Power of Simplicity



Smoother communication



Loud and clear audio



All-day battery



Precise positioning




Open platform



Rugged and durable



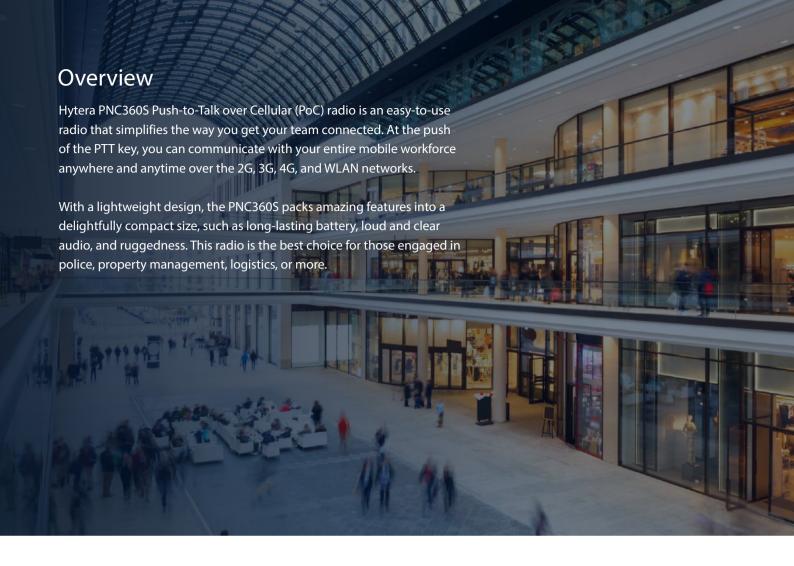



Highlights

Smoother communication

Thanks to the exterior antenna design, the radio RX sensitivity is improved by 2 dB. This makes you enjoy smoother communication even in areas with weak signal such as suburb, indoor, or underground.

Loud and clear audio

The built-in 3-watt speaker brings you a loud audio. With the patented distortion reduction technology, the radio can deliver you the clear and crisp audio even in a noisy downtown, gym, station, or more. Moreover, the patented howling nosie suppression technology is adopted to prevent feedback howling nosie from multiple radios which are close to each other during transmitting or receiving.





All-day battery

With unique low power consumption design, the radio has a 4,000 mAh battery which meets 24-hour work time on a 5-5-90 duty cycle (5% of transmitting time, 5% receiving, and 90% standby). Replacement design helps you replace the battery in a second.

Precise positioning

With various combination of GPS, BDS, GLONASS and higher-precision positioning module, the radio can be located faster and more precise for efficient dispatch.



Open platform

Featuring the universal and open android operating system as well as open application program interface (API), the radio can be compatible with various third-party app and personalized apps on the market.

Rugged and durable

Rated at IP67, the radio is made tough to withstand water, dust, 1.2-meter drop, and extreme temperatures. It always performs as expected in any harsh environments.



Specifications

Network

Frequency Range

Europe/Asia/Africa: GSM: 850/900/1800/1900

CDMA: BC0 TD-SCDMA: B34/B39 WCDMA: B1/B3/B5/B8

TDD-LTE: B38/B39/B40/B41(2496-2690 MHz) FDD-LTE: B1/B3/B5/B7/B8/B20/B26/B28

America:GSM: 850/900/1800/1900 WCDMA: B2/B4/B5

TDD-LTE: B38/B41(2496-2690 MHz)

FDD-LTE: B2/B3/B4/B5/B7/B12/B13/B17/B26/B28

	1.00 2.110 (7.00) 0.07 (0.00) 0.00 (0.00)
Hardware	
Operating System	Android 7.0
Memory	1GB RAM+8GB ROM
Dimensions (H x W x D)	104 x 54.6 x 6.5 mm
Weight	About 170 g (with standard battery)
Screen Size	1.77 inches
Screen Resolution	160 x 128
SIM Card	1 Nano-SIM
Positioning	GPS/BDS/GLONASS/A-GPS
WLAN	2.4GHz, 802.11 b/g/n
ВТ	BT 4.1
External Interface	Type-C, 3.5 mm audio jack
Battery Capacity	4000 mAh (replaceable)
Charging Mode	Type-C
Speaker Power	2 W (rated), 3 W (max.)
Environmental	
Operating Temperature	-20°C to 60°C
Storage Temperature	-30°C to 70°C

Certification

Drop-proof

Ingress Protection

Certification CE\FCC\IC\MIL-STD-810H

Accessories

ESD



Li-ion Battery

Standard [



Data Cable

Optional:

IP67

1.2m



Strap



Belt Clip

IEC 61000-4-2,(ESD)± 12 kV (Air); ±8 kV (Contact)



Power Adapter



Application Scenarios



Urban management



Property management



Logistics



Supermarkets



Industrial parks



Hotels









